NEW YORK UNIVERSITY

Institute of Mathematical Sciences

Division of Electromagnetic Research

RESEARCH REPORT No. EM-124

Vertex Excited Surface Waves on One Face of a Right Angled Wedge

S. N. KARP and F. C. KARAL, JR.

JANUARY, 1959

NEW YORK UNIVERSITY

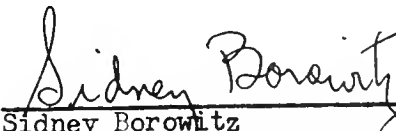Institute of Mathematical Sciences

Division of Electromagnetic Research

Research Report No. EM-124
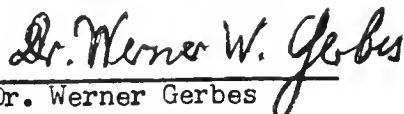
VERTEX EXCITED SURFACE WAVES ON ONE

FACE OF A RIGHT ANGLED WEDGE

S.N. Karp and F.C. Karal, Jr.

S.N. Karp

S.N. Karp

F.C. Karal, Jr.

F.C. Karal, Jr.

Sidney Borowitz

Sidney Borowitz
Acting Project Director

Dr. Werner W. Gerbes

Dr. Werner Gerbes
Contract Monitor

January, 1959

Requests for additional copies by Agencies of the Department of Defense, their contractors, and other Government agencies should be directed to the:

ARMED SERVICES TECHNICAL INFORMATION AGENCY
DOCUMENTS SERVICE CENTER
ARLINGTON HALL STATION
ARLINGTON 12, VIRGINIA

Department of Defense contractors must be established for ASTIA services or have their 'need-to-know' certified by the cognizant military agency of their project or contract.

All other persons and organizations should apply to the:

U.S. DEPARTMENT OF COMMERCE
OFFICE OF TECHNICAL SERVICES
WASHINGTON 25, D.C.

Abstract

The problem of the propagation of electromagnetic waves by a magnetic line dipole source located at the corner of a right angled wedge is considered. It is assumed that an impedance or mixed boundary condition is prescribed on one of the wedge surfaces and that a homogeneous boundary condition is prescribed on the other. The impedance boundary condition is such that surface waves are generated. The amplitude of the surface wave generated is determined. A comparison is made between the magnitude of the surface wave for this problem and that of a magnetic-line dipole source located at the corner of a right angled wedge with the same impedance boundary condition prescribed on both[*] surfaces. The far field amplitude of the radiated electromagnetic field is also given as an elementary function of the angle of observation.

---

* Karp, S.N. and Karal, F.C. - Surface Waves on a Right Angled Wedge, N.Y.U., Inst. Math. Sci., Div. E.M. Res., Research Report EM-116, Aug., 1958. To appear in Comm. Pure and Appl. Math.

Table of Contents

1.   Introduction

The problem of the propagation of electromagnetic waves produced by a magnetic line dipole source located at the corner of a right angled wedge is considered. It is assumed that an impedance or mixed boundary condition is prescribed on one of the wedge surfaces and that a homogeneous boundary condition is prescribed on the other. The impedance boundary condition is such that surface waves are generated. The amplitude of the surface wave is determined. A comparison is made between the magnitude of the surface wave for this problem and that of a magnetic-line dipole source located at the corner of a right angled wedge with the same impedance boundary condition prescribed on both surfaces. The latter problem has already been treated by the authors. (See Karp and Karal[3].) The comparison of the surface waves for the two different configurations is made on the assumption that the sources have the same strength. The far field representation of the radiated electromagnetic field is also given.

The impedance boundary condition prescribed in the present problem is of the form

(1.1) $\frac{1}{r} \frac{\partial u}{\partial \theta} - \lambda u = 0$, $\theta = \alpha$

where u is the z component of the magnetic vector, r and θ are the usual polar coordinates, α is the wedge angle, and λ is a constant characteristic of the surface. The value of λ is given by

(1.2) $\lambda = +i\omega\epsilon Z = +i\omega\epsilon(R - iX)$

where ϵ is the permittivity of free space, ω is the angular frequency and Z,

R and X are the impedance, resistance and reactance of the surface, respectively.
It is well known that for homogeneous media of large finite conductivity,
R and X are positive in sign, small in magnitude and approximately equal.
For corrugated or dielectric-coated surfaces, R and X are positive in sign
and R is much smaller than X. Hence X is positive in either case and
equation (1.2) implies that

(1.3) $\text{Re}\lambda > 0$.

For illustrations of these boundary conditions see the Introduction of
Reference [3] and [7] where the appropriate references are cited. The condition
$R \ll X$ is of course the most important special case insofar as surface
waves are concerned.

The problem we treat is not separable because of the mixed boundary
conditions. This difficulty can be overcome by the introduction of an
auxiliary function which is a linear combination of the magnetic-field and
its cartesian derivatives. The auxiliary function is chosen in such a way
that it satisfies the wave equation and simple homogeneous boundary
conditions. Once the auxiliary function is obtained, the original field
can be determined by solving a partial differential equation. This idea is
due to Stoker[6] and Lewy[4] who studied problems in water wave theory.
Similar ideas have been employed by the authors in the solution of diffraction
problems arising in electromagnetic theory. See [1] [2], [3] and [7].

Section 2 contains the exact solution of the problem stated in the
preceding paragraphs. The limiting cases of small and large λ/k are
studied and simplified expressions for the surface waves in both cases are
given. A comparison between these results and those obtained in the problem

cf a line source located at the tip of a right angled wedge with the same impedance boundary condition prescribed on both surfaces is made. In Section 3 we discuss the radiated far field and obtain simple expressions for arbitrary values of λ.

2. Solution

Consider the right angled wedge $y = 0$, $x > 0$ and $x = 0$, $y < 0$, and suppose there is a magnetic-line dipole located at the origin $x = 0$, $y = 0$. (See Figure 1.) The boundary conditions on the surface are given by

$$(2.1) \qquad \begin{cases} \dfrac{\partial u}{\partial y} = 0 & y = 0,\ x > 0 \\[2ex] \dfrac{\partial u}{\partial x} - \lambda u = 0 & x = 0,\ y < 0 \end{cases}$$

where u is the magnetic vector H_z and λ is a constant related to the material comprising the surface. We wish to solve the time reduced Maxwell's equations, subject to the prescribed conditions, and obtain the amplitude of the surface wave propagated on the surface $x = 0$, $y < 0$.

The time dependent form of Maxwell's equations is

$$(2.2) \qquad \begin{cases} \text{curl } \vec{H} = -i\omega\epsilon\vec{E} \\[1ex] \text{curl } \vec{E} = i\omega u\vec{H} \end{cases}$$

where $\vec{E}$ and $\vec{H}$ are the electric and magnetic field intensities, and ϵ and u are the permittivity and magnetic permeability of free space. We assume the time dependence to be of the form $e^{-i\omega t}$. Because of the geometry, the field produced is independent of z and hence the field is completely determined by the value of H_z. We have

$$(2.3) \qquad H_x = H_y = E_z = 0$$

and

$$(2.4) \qquad \begin{cases} E_x = -\dfrac{1}{i\omega\epsilon}\dfrac{\partial H_z}{\partial y} \\[2ex] E_y = +\dfrac{1}{i\omega\epsilon}\dfrac{\partial H_z}{\partial x} \end{cases}$$
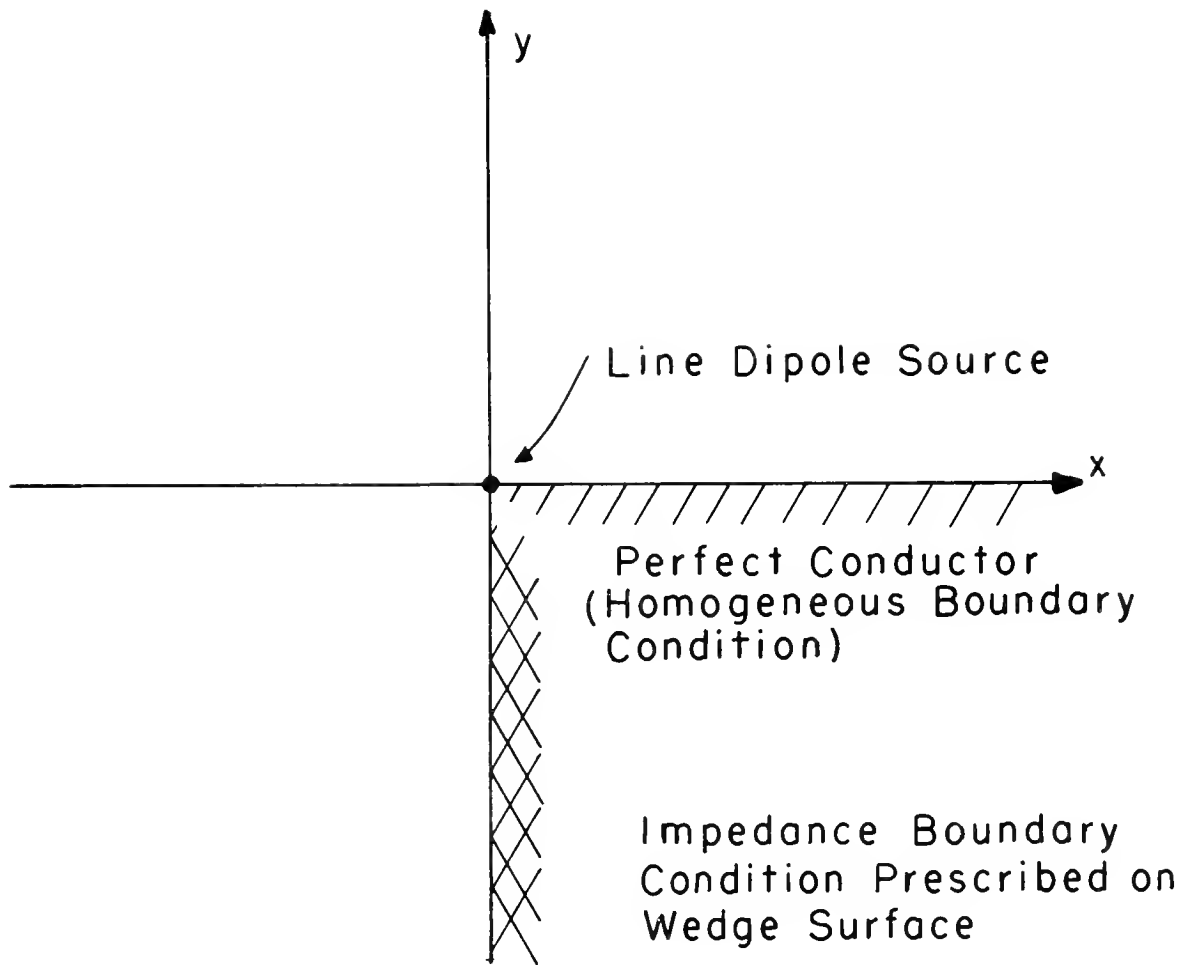
FIGURE I

The field component $H_z \equiv u$ satisfies the equation

$$(2.5) \qquad (\nabla^2 + k^2)u = - 4\pi\delta(x\text{-}0)\delta(y\text{-}0)$$

where ∇^2 is the rectangular Laplacian, k is the propagation constant of free space and δ is the Dirac delta function. Therefore, the mathematical problem reduces to that of solving the inhomogeneous wave equation (2.5) subject to the boundary conditions given by (2.1). In addition to the prescribed boundary conditions, we require that the far field be outgoing and that the total magnetic field, excluding the source, be finite everywhere.

Let us make the substitution

$$(2.6) \qquad v = \frac{\partial u}{\partial x} - \lambda u \ .$$

Then v satisfies the following equation:

$$(2.7) \qquad (\nabla^2 + k^2)v = 0 \qquad , \quad x^2 + y^2 \neq 0 \ , \quad 0 \leq \theta \leq \frac{3\pi}{2} \ ,$$

subject to the simple conditions

$$(2.8) \quad \begin{cases} (1) \quad \dfrac{\partial v}{\partial y} = 0 \qquad y = 0 \ , \ x > 0 \\[2mm] (2) \quad v = 0 \qquad x = 0 \ , \ y < 0 \\[2mm] (3) \quad \text{Outgoing waves at infinity.} \end{cases}$$

If the problem for v can be solved, then we can obtain the solution for the problem involving u since (2.6) can be integrated.

A particular solution of (2.6) is

$$(2.9) \qquad u_p(x,y) = -e^{\lambda x} \int_x^\infty e^{-\lambda\xi} v(\xi,y)d\xi \ .$$

The range of integration is dictated by the condition that Re $\lambda > 0$. It is important to point out that the function v does not have to be finite at the origin. Thus we should first introduce all radiating solutions, no matter how singular at the origin, that satisfy the appropriate boundary conditions for v. Out of this class of solutions we finally select only those that yield an everywhere finite value of the total magnetic-field (excluding the source) in the original physical problem involving u. By employing the method of separation of variables, we find that the most general representation for v which satisfies conditions (2.8) is of the form $\sum_n a_n H^{(1)}_{(2n+1)/3}(kr) \cos\left[(2n+1)/3\right]\Theta$, where n is an integer and $H^{(1)}_{(2n+1)/3}(kr)$ is a Hankel function of the first kind of order $(2n+1)/3$. Since v cannot be too singular, the only admissible functions of this class are

$$(2.10) \qquad v(x,y) = c_o H^{(1)}_1(kr)\cos\Theta + c_1 H^{(1)}_{1/3}(kr)\cos\frac{\Theta}{3} \quad .$$

The above expression for v is a wave function, defined, by means of (2.7), in the angular sector $0 \leq \Theta \leq \frac{3\pi}{2}$. We note, however, that we can extend the range of definition of v to include the angular sector $0 \leq \Theta \leq 2\pi$ by means of the reflection principle since v vanishes on the negative y-axis. This extension is necessary since the range of integration of the particular solution (2.9) extends into the fourth quadrant for negative values of y. Using this extended definition of v, the particular solution (2.9) becomes

$$(2.11) \qquad u_p(x,y) = -e^{\lambda x} \int_x^\infty e^{-\lambda\xi} \left\{ c_o H^{(1)}_1(kr)\cos\Theta + c_1 H^{(1)}_{1/3}(kr)\cos\frac{\Theta}{3} \right\} d\xi \quad \cdot$$

The above result, though well defined, does not satisfy all the conditions of the problem since it is not regular across the line $y = 0$, $x < 0$. This difficulty can be overcome by adding a complementary solution, u_e say, of the inhomogeneous equation (2.6) to (2.11). We then obtain the representation

$$(2.12) \qquad u(x,y) = -e^{\lambda x} \int_x^\infty e^{-\lambda \xi} \left\{ c_0 H_1^{(1)}(kr)\cos \theta + c_1 H_{1/3}^{(1)}(kr)\cos \frac{\theta}{3} \right\} d\xi$$

$$+ \begin{bmatrix} c_2 e^{\lambda x - i \sqrt{k^2+\lambda^2}} & , \ y < 0 \\ \\ 0 & , \ y > 0 \end{bmatrix} \ ,$$

where $r = \sqrt{\xi^2+y^2}$, $\theta = \arctan \frac{\xi}{y}$ and $0 \leq \theta \leq 2\pi$. The complementary solution u_c, which is indicated in square brackets in (2.12) is obviously not a wave function since it is discontinuous across the line $y = 0$. However, although each solution separately is discontinuous together with its y-derivative along the negative x-axis, the solution $u = u_p + u_c$ of (2.12) must be regular there. From this fact we can derive two relations between the constants c_0, c_1 and c_2 by calculating the discontinuities of u and $\frac{\partial u}{\partial y}$ across the negative x-axis and setting the discontinuities equal to zero. These calculations completely solve the problem because the constant c_0 is related to the source strength and is known. Hence there are a sufficient number of equations to determine all of the unknown constants. We note that the form of the term in brackets in (2.12) is that of a surface wave with an amplitude given by c_2.

Before proceeding to the calculation of the discontinuities and the value of the constants c_1 and c_2, we first simplify the expression for u and then determine $\frac{\partial u}{\partial y}$. By using the relation

$$(2.13) \qquad \frac{\partial}{\partial x} H_o^{(1)}(kr) = -k H^{(1)}(kr)\cos \theta$$

and integrating by parts, (2.12) becomes

$$(2.14) \qquad u(x,y) = -\frac{c_o}{k}\left\{ H_o^{(1)}(kr) - \lambda e^{\lambda x}\int_x^\infty e^{-\lambda\xi}H_o^{(1)}(kr)d\xi \right\}$$

$$- c_1 e^{\lambda x}\int_x^\infty e^{-\lambda\xi}H_{1/3}^{(1)}(kr)\cos\frac{\theta}{3}d\xi + \begin{bmatrix} c_2 e^{\lambda x - 1\sqrt{k^2+\lambda^2}} & , \quad y < 0 \\ 0 & , \quad y > 0 \end{bmatrix} \quad .$$

At this stage we can determine c_o since we recognize the Hankel function $H_o^{(1)}(kr)$ as being the Green's function for a line source. The solution of (2.5) for a simple point source located at the origin is given by the well-known result

$$(2.15) \qquad G(r,\theta;0,0) = i\pi H_o^{(1)}(kr) \quad .$$

Hence the proper normalization for a point source is obtained provided we let

$$(2.16) \qquad c_o = -i\pi k \quad .$$

We next determine $\frac{\partial u}{\partial y}$. We have

$$(2.17) \quad U_y(x,y) \equiv \frac{\partial u}{\partial y}(x,y) = -\frac{c_o}{k}\left[\frac{\partial}{\partial y}H_o^{(1)}(kr) - \lambda e^{\lambda x}\int_x^\infty e^{-\lambda\xi}\frac{\partial}{\partial y}\left\{H_o^{(1)}(kr)\right\}d\xi \right]$$

$$- c_1 e^{\lambda x}\int_x^\infty e^{-\lambda\xi}\frac{\partial}{\partial y}\left\{H_{1/3}^{(1)}(kr)\cos\frac{\theta}{3}\right\}d\xi$$

$$+ \begin{bmatrix} -c_2 i\sqrt{k^2+\lambda^2}\,e^{\lambda x - 1\sqrt{k^2+\lambda^2}\,y} & , \quad y < 0 \\ 0 & , \quad y > 0 \end{bmatrix} ,$$

where we have taken the derivative inside the integral sign. By using the following relations

$$(2.18) \qquad \frac{\partial}{\partial y}H_o^{(1)}(kr) = -kH_1^{(1)}(kr)\sin\theta$$

(2.19)　　$\dfrac{\partial}{\partial y}\left\{H_{1/3}^{(1)}(kr)\cos\dfrac{\theta}{3}\right\} - \dfrac{\partial}{\partial x}\left\{H_{1/3}^{(1)}(kr)\sin\dfrac{\theta}{3}\right\} = ke^{i\frac{2\pi}{3}}H_{2/3}^{(1)}(kr)\sin\dfrac{2\theta}{3}$

and integrating by parts we obtain

(2.20)　　$u_y(x,y) = -\dfrac{c_o}{k}\left\{- kH_1^{(1)}(kr)\sin\theta + k\lambda e^{\lambda x}\displaystyle\int_x^\infty e^{-\lambda\xi}H_1^{(1)}(kr)\sin\theta\, d\xi\right\}$

$$+ c_1 H_{1/3}^{(1)}(kr)\sin\dfrac{\theta}{3} - c_1\lambda e^{\lambda x}\int_x^\infty e^{-\lambda\xi}H_{1/3}^{(1)}(kr)\sin\dfrac{\theta}{3}\, d\xi$$

$$-c_1 k e^{i\frac{2\pi}{3}} e^{\lambda x}\int_x^\infty e^{-\lambda\xi}H_{2/3}^{(1)}(kr)\sin\dfrac{2\theta}{3}d\xi + \left[\begin{array}{ll} -c_2 i\sqrt{k^2+\lambda^2}\; e^{\lambda x - i\sqrt{k^2+\lambda^2}\; y}, & y<0 \\[2mm] 0 & ,y>0 \end{array}\right].$$

It was noted earlier that the constants c_1 and c_2 can be determined by requiring that u and its derivatives be continuous throughout the region of physical space $(0 \le \theta \le \frac{3\pi}{2})$. This is equivalent to calculating the discontinuities of u and $\frac{\partial u}{\partial y}$ across the negative x-axis and setting the discontinuities equal to zero. Hence for $u(x,y)$ to be a wave function, we require that the following jump conditions be satisfied:

(2.21)　　
$\left\{\begin{array}{l} \text{(I)}\quad [u] \equiv \left\{u(x,0^+) - u(x,0^-)\right\} = 0 \quad,\quad x < 0 \\[4mm] \text{(II)}\; [u_y] \equiv \left\{u_y(x,0^+) - u_y(x,0^-)\right\} = 0 \;,\; x < 0 \quad. \end{array}\right.$

The first jump condition yields immediately

(2.22)　　　　　　$c_2 = -\dfrac{3}{2}\, c_1\, I_{1/3}(k,\lambda)$

where we have used the notation

$$(2.23) \qquad I_\nu(k,\lambda) = \int_0^\infty e^{-\lambda\xi} H_\nu^{(1)}(k|\xi|)d\xi \ .$$

We note that

$$(2.24) \quad I_\nu(k,\lambda) = \frac{i}{\sin \nu\pi} \frac{e^{-i\nu\frac{\pi}{2}}}{k^\nu \sqrt{\lambda^2+k^2}} \left[e^{-i\nu\frac{\pi}{2}}(\sqrt{\lambda^2+k^2} - \lambda)^\nu - e^{i\nu\frac{\pi}{2}}(\sqrt{\lambda^2+k^2} +\lambda)^\nu \right]$$

where $-1 > \mathrm{Re}\nu < +1$. (See Magnus and Oberhettinger [5].) The second jump condition requires more careful treatment. If we substitute (2.20) into jump condition (II) and use (2.16) we obtain

$$(2.25) \quad [u_y] = \underset{y\to+0}{\mathrm{Lim}} 2\pi ik\lambda e^{\lambda x} \int_0^\infty e^{-\lambda\xi} H_1^{(1)}(k\sqrt{\xi^2+y^2}) \frac{y}{\sqrt{\xi^2+y^2}} \ d\xi$$

$$+ c_1\lambda e^{\lambda x}\sin \frac{2\pi}{3} \int_0^\infty e^{-\lambda\xi} H_{1/3}^{(1)}(k|\xi|)d\xi$$

$$+ c_1 k e^{i\frac{2\pi}{3}} e^{\lambda x}\sin \frac{4\pi}{3} \int_0^\infty e^{-\lambda\xi} H_{2/3}^{(1)}(k|\xi|)d\xi + c_2 i \sqrt{k^2+\lambda^2} e^{\lambda x} = 0 \quad .$$

Let us consider the expression

$$(2.26) \qquad J = \underset{y\to+0}{\mathrm{Lim}} \int_0^\infty e^{-\lambda\xi} H_1^{(1)}(k\sqrt{\xi^2+y^2}) \frac{y}{\sqrt{\xi^2+y^2}} \ d\xi \ .$$

The integrand in (2.26) tends to zero with y except in the neighborhood of $\xi = 0$. Hence the only possible contribution occurs when ξ lies in an interval 0 to ϵ, where ϵ is arbitrarily small. Since we assume that y is already small, we can use the asymptotic representations for the exponential

and Hankel functions appearing in the integrand.   Hence

$$(2.27) \qquad J = \frac{-2i}{\pi k} \lim_{y \to +0} \int_0^\epsilon \frac{y}{\xi^2 + y^2}\, d\xi \quad .$$

If we make the substitution $\xi = yt$, the above integral becomes

$$(2.28) \qquad J = -\frac{2i}{\pi k} \int_0^\infty \frac{dt}{1+t^2} = -\frac{i}{k} \quad .$$

Substituting this result into (2.25) and using the notation defined in (2.23), the second jump condition becomes

$$(2.29) \qquad + 2\pi\lambda + c_1\lambda \sin \frac{2\pi}{3} I_{1/3}(k,\lambda) + c_1 k e^{i\frac{2\pi}{3}} \sin \frac{4\pi}{3} I_{2/3}(k,\lambda) + c_2 i \sqrt{k^2+\lambda^2} = 0 \quad .$$

By substituting (2.22) into (2.29) we find c_1.   We obtain

$$(2.30) \qquad c_1 = -\frac{4\pi}{\sqrt{3}} \frac{\lambda}{(\lambda - \sqrt{3}\, i\, \sqrt{k^2+\lambda^2}) I_{1/3} - \sqrt{3}\, k e^{i\frac{2\pi}{3}} I_{2/3}}$$

and

$$(2.31) \qquad c_2 = + 2\sqrt{3}\, \pi \frac{\lambda I_{1/3}}{(\lambda - \sqrt{3}\, i\, \sqrt{k^2+\lambda^2}) I_{1/3} - \sqrt{3}\, k e^{i\frac{2\pi}{3}} I_{2/3}} \quad .$$

The value of c_2 is the amplitude of the surface wave propagated along the wedge surface.

We next determine the values of c_1 and c_2 for small and large values of λ/k.   When λ/k is small it is easily shown that

$$(2.32) \qquad I_{1/3}^{\cdot} \approx \frac{1}{k}\left(1 - \frac{1}{\sqrt{3}}\right) = \frac{2}{\sqrt{3k}}\, e^{-i\frac{\pi}{6}}$$

$$(2.33) \qquad I_{2/3} \approx \frac{1}{k}(1 - i\sqrt{3}) = \frac{2}{k}\, e^{-i\frac{\pi}{3}}$$

and the approximate expressions for c_1 and c_2 become

$$(2.34) \qquad c_1 \approx \frac{2\pi}{\sqrt{3}} \frac{\lambda}{(1+\sqrt{3})} e^{-i\frac{\pi}{3}}$$

$$(2.35) \qquad c_2 \approx \frac{2\pi i}{(1+\sqrt{3})} \left(\frac{\lambda}{k}\right) \quad .$$

When λ/k is large we find that

$$(2.36) \qquad I_{1/3} \approx - i \frac{2}{\sqrt{3}} \left(\frac{2}{k}\right)^{1/3} \frac{1}{\lambda^{2/3}}$$

$$(2.37) \qquad I_{2/3} \approx - i \frac{2}{\sqrt{3}} \left(\frac{2}{k}\right)^{2/3} \frac{1}{\lambda^{1/3}}$$

and the approximate expressions for c_1 and c_2 become

$$(2.38) \qquad c_1 \approx \frac{\pi k e^{-i\frac{\pi}{6}}}{3\sqrt{2}} \left(\frac{\lambda}{k}\right)^{2/3}$$

$$(2.39) \qquad c_2 \approx \sqrt{3} \pi e^{i\frac{\pi}{3}} \quad .$$

It is of interest to compare the amplitude of the surface wave generated in this problem with that generated by a line source located at the tip of a right-angled wedge with the same impedance boundary condition prescribed on both surfaces. The latter problem has previously been solved[3] and the amplitude of the surface wave propagated on the wedge surface $x = 0$, $y < 0$ is given by

$$(2.40) \qquad c_3 = 2\sqrt{3}\,\pi \frac{\lambda I_{2/3} - k e^{i\frac{\pi}{3}} I_{1/3}}{\left\{(i\sqrt{k^2+\lambda^2} - \sqrt{3}\,\lambda) I_{2/3} + \sqrt{3}\,k e^{i\frac{\pi}{3}} I_{1/3}\right\}} \frac{\lambda}{(i\sqrt{k^2+\lambda^2} - \lambda)} \quad .$$

When λ/k is small we find that

$$(2.41) \qquad c_3 \approx \pi i \left(\frac{\lambda}{k}\right)$$

and when λ/k is large

$$(2.42) \qquad c_3 \approx \frac{2\pi}{(1-i)(1-\frac{i}{\sqrt{3}})} = \frac{\sqrt{3}}{2}\pi \, e^{+i\frac{5\pi}{12}} \qquad .$$

Hence, when the value of λ/k is small, the ratio of the amplitude of the surface wave on a wedge with an impedance boundary condition on one surface to that on both surfaces is given by $2/(1+\sqrt{3})$ or 0.732. When the value of λ/k is large, the ratio is given by $2e^{-i\,\pi/12}$. In the limit $\lambda/k \to \infty$ therefore, the total energy that goes into surface waves in our present configuration is twice the energy so utilized when both faces of the wedge can support surface waves.

3. Determination of the radiated far field

We have already obtained the exact solution for a line source located at the tip of a right-angled wedge with an impedance type boundary condition prescribed on one surface. The exact solution as given by (2.14), however, is complicated and it is desirable to find a simple expression for the radiated far field. From (2.6) and (2.10) we have

$$(3.1) \qquad v = \frac{\partial u}{\partial x} - \lambda u$$

and

$$(3.2) \qquad v = c_0 H_1^{(1)}(kr) \cos \theta + c_1 H_{1/3}^{(1)}(kr) \cos \frac{\theta}{3} \ .$$

When kr is large (3.2) becomes

$$(3.3) \qquad v = c_0 \sqrt{\frac{2}{\pi kr}} e^{i(kr - \frac{3\pi}{4})} \cos \theta + c_1 \sqrt{\frac{2}{\pi kr}} e^{i(kr - \frac{5\pi}{12})} \cos \frac{\theta}{3} \ .$$

We expect the far field of the z-component of the magnetic field vector to have a similar form, except that it contains surface wave terms which are appreciable near the wedge surface $x = 0$, $y < 0$. Hence for a fixed θ, as $r \to \infty$ we have

$$(3.4) \qquad u = \left[\frac{\ell(\theta)}{\sqrt{r}} e^{ikr} + 0(\frac{1}{r^{3/2}}) \right] \ , \quad \theta \neq 3\pi/2 \ ,$$

where $\ell(\theta)$ is unknown. Now

$$(3.5) \qquad \frac{\partial}{\partial x} = \cos \theta \frac{\partial}{\partial r} - \frac{1}{r} \sin \theta \frac{\partial}{\partial \theta} \ .$$

If we substitute (3.3), (3.4) and (3.5) into (3.1), and keep terms of order $r^{-1/2}$, we obtain

$$(3.6) \qquad \ell(\theta) = \sqrt{\frac{2}{\pi k}} \ \frac{c_o e^{-i\frac{3\pi}{4}} \cos\theta + c_1 e^{-i\frac{5\pi}{12}} \cos\frac{\theta}{3}}{ik \cos\theta - \lambda} \ .$$

Hence the desired radiated far field is given by

$$(3.7) \qquad u(r,\theta) = \sqrt{\frac{2}{\pi k r}} \ e^{ikr} \frac{c_o e^{-i\frac{3\pi}{4}} \cos\theta + c_1 e^{-i\frac{5\pi}{12}} \cos\frac{\theta}{3}}{ik \cos\theta - \lambda} + O(\frac{1}{r^{3/2}})$$

where c_o, c_1 and c_2 are given by (2.16), (2.30) and (2.31), respectively.

References

[1] Karal, F.C. and S.N. Karp
— Diffraction of a skew plane electromagnetic wave by an absorbing right angled wedge; Comm. Pure Appl. Math., to appear shortly. Also, N.Y.U., Inst. Math. Sci., Div. EM Res., Research Report No. EM-111, Feb., 1958.

[2] Karp, S.N.
— Two dimensional Green's function for a right angled wedge under an impedance boundary condition; to appear.

[3] Karp, S.N. and F.C. Karal
— Surface waves on a right angled wedge; N.Y.U., Inst. Math. Sci., Div. EM Res., Research Report EM-116, Aug., 1958. Condensed version: 1958 IRE Wescon Convention Record, Part I, 101-103.

[4] Lewy, H.
— Waves on sloping beaches; Bull. AMS, 52, 737(1946).

[5] Magnus, W. and F. Oberhettinger
— Formulas and theorems for the Special Functions of Mathematical Physics; 2nd edit.; Berlin, Springer, 1948.

[6] Stoker, J.J.
— Surface waves in water of variable depth; Quarterly of Appl. Math., 5, 1(1947).

[7] Karal, F.C. and S.N. Karp
— Diffraction of a plane wave by a right angled wedge which sustains surface waves on one face; N.Y.U., Inst. Math. Sci., Div. EM Res., Research Report No. EM-123, Jan., 1959.

DISTRIBUTION LIST FOR RESEARCH REPORTS

Contract No. AF 19(604)1717

(ONE copy unless otherwise noted)

Commander
Air Research and Development Command
Andrews Air Force Base
Washington 25, D. C.
Attn: Major E. Wright, RDTCC

Director of Resident Training
3380th Technical Training Group
Keesler Air Force Base, Mississippi
Attn: OA-3011 Course

Director
Air University Library
Maxwell Air Force Base, Alabama

Commander
Air Force Missile Test Center
Patrick Air Force Base, Florida
Attn: MTE - for classified documents
Attn: MU-411, Technical Library - for
unclassified documents

Tactical Air Group
Directorate of Research and Development
DCS/D
Headquarters, USAF
Washington, D. C.
Attn: Major R. L. Stell

Director, Communications and Electronics
Hq. U. S. Air Force
Washington 25, D. C.
Attn: AFOAC S/E

Commander
Wright Air Development Center
Wright-Patterson Air Force Base, Ohio
Attn: WCLRS-6, Mr. Portune

Wright Air Development Center
Wright-Patterson Air Force Base, Ohio
Flight Research Laboratory
Research Division
Attn: WCRRA

Commander
Wright Air Development Center
Wright-Patterson Air Force Base, Ohio
Attn: N. Draganjac, WCLNQ-4

Commander
Wright Air Development Center
Wright-Patterson Air Force Base, Ohio
Attn: Mr. Paul Springer. WCLRE-5

Commander
Air Technical Intelligence Center
Wright-Patterson Air Force Base, Ohio
Attn: AFCIN-4B1a

Commander
Rome Air Development Center
Griffiss Air Force Base, New York
Attn: RCSSTL-1

Commander
Rome Air Development Center
Griffiss Air Force Base, New York
Attn: Mr. Donald Dakan, RCUE

Commander
Rome Air Development Center (ARDC)
Griffiss Air Force Base, New York
Attn: Dr. John S. Burgess, RCE

Commander
Air Force Missile Development Center
Holloman Air Force Base, New Mexico
Attn: HDOIL, Technical Library

Director
U. S. Army Ordnance
Ballistic Research Laboratories
Aberdeen Proving Ground, Maryland
Attn: Ballistic Measurements Laboratory

Ballistic Research Laboratories
Aberdeen Proving Ground, Maryland
Attn: Technical Information Branch

Director
Evans Signal Laboratory
Belmar, New Jersey
Attn: Mr. O. C. Woodyard

U. S. Army Signal Engineering Labs.
Evans Signal Laboratory
Belmar, New Jersey
Attn: Technical Document Center

Massachusetts Institute of Technology
Signal Corps Liaison Officer
Cambridge 39, Mass.
Attn: A. D. Bedrosian, Room 26-131

Commanding General, SIGFM/EL-PC
U. S. Army Signal Engineering Labs.
Fort Monmouth, New Jersey
Attn: Dr. Horst H. Kedesdy
Deputy Chief, Chem-Physics Branch

Commander
Army Rocket and Guided Missile Agency
Redstone Arsenal, Alabama
Attn: Technical Library, ORDXR-OTL

Commanding General
U. S. Army Signal Engineering Labs.
Fort Monmouth, New Jersey
Attn: SIGFM/EL-AT

Department of the Army
Office of the Chief Signal Officer
Washington 25, D. C.
Attn: SIGRD-7

Office of Chief Signal Officer
Engineering and Technical Division
Washington 25, D. C.
Attn: SIGNET-5

Guided Missile Fuze Library
Diamond Ordnance Fuze Laboratories
Washington 25, D. C.
Attn: R. D. Hatcher, Chief Microwave
Development Section

(10) Armed Services Technical Information
Agency
Arlington Hall Station
Arlington 12, Virginia

(2) Library
Boulder Laboratories
National Bureau of Standards
Boulder, Colorado

National Bureau of Standards
Department of Commerce
Washington 25, D. C.
Attn: Mr. A. G. McNish

National Bureau of Standards
Department of Commerce
Washington 25, D. C.
Attn: Gustave Shapiro, Chief
Engineering Electronics Section
Electricity and Electronics Div.

(2) Office of Technical Services
Department of Commerce
Washington 25, D. C.
Attn: Technical Reports Section
(Unclassified only)

Director
National Security Agency
Washington 25, D. C.
Attn: R/D (331)

(2) Hq. Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Mass.
Attn: CROTLR-2   - P. Condon

(5) Hq. Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Mass.
Attn: CROTLS - J. Armstrong

(5) Hq. Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Mass.
Attn: CRRD

Director, Avionics Division (AV)
Bureau of Aeronautics
Department of the Navy
Washington 25, D. C.

Chief, Bureau of Ships
Department of the Navy
Washington 25, D. C.
Attn: Mr. E. Johnston, Code 833E

Commander
U. S. Naval Air Missile Test Center
Point Mugu, California
Attn: Code 366

U. S. Naval Ordnance Laboratory
White Oak
Silver Spring 19, Maryland
Attn: The Library

Commander
U. S. Naval Ordnance Test Station
China Lake, California
Attn: Code 753

Librarian
U. S. Naval Postgraduate School
Monterey, California

Air Force Development Field Representative
Naval Research Laboratory
Washington 25, D. C.
Attn: Code 1072

Director
U. S. Naval Research Laboratory
Washington 25, D. C.
Attn: Code 2027

Dr. J. I. Bohnert, Code 5210
U. S. Naval Research Laboratory
Washington 25, D. C. (Unclassified only)
Classified to be sent to:
Director
U. S. Naval Research Laboratory
Attn: Code 5200
Washington 25, D. C.

Commanding Officer and Director
U. S. Navy Underwater Sound Laboratory
Fort Trumbull, New London, Connecticut

Chief of Naval Research
Department of the Navy
Washington 25, D. C.
Attn: Code 427

Commanding Officer and Director
U. S. Navy Electronics Laboratory (Library)
San Diego 52, California

Chief, Bureau of Ordnance
Department of the Navy
Washington 25, D. C.
Attn: Code Ad3

Chief, Bureau of Ordnance
Department of the Navy
Surface Guided Missile Branch
Washington 25, D. C.
Attn: Code ReS1-e

Chief, Bureau of Ordnance
Department of the Navy
Washington 25, D. C.
Attn: Fire Control Branch (ReS4)

Department of the Navy
Bureau of Aeronautics
Technical Data Division, Code 4106
Washington 25, D. C.

Chief, Bureau of Ships
Department of the Navy
Washington 25, D. C.
Attn: Code 817B

Commanding Officer
U. S. Naval Air Development Center
Johnsville, Pennsylvania
Attn: NADC Library

Commander
U. S. Naval Air Test Center
Patuxent River, Maryland
Attn: ET-315, Antenna Branch

Director
Naval Ordnance Laboratory
Corona, California

Commanding Officer
U. S. Naval Ordnance Laboratory
Corona, California
Attn: Mr. W. Horenstein, Division 72

Airborne Instruments Laboratory, Inc.
160 Old Country Road
Mineola, New York
Attn: Dr. E. G. Fubini, Director
      Research and Engineering Division

Aircom, Inc.
354 Main Street
Winthrop, Mass.

American Machine and Foundry Company
Electronics Division
1085 Commonwealth Avenue
Boston 15, Mass.
Attn: Mrs. Rita Moravcsik, Librarian

Andrew Alford, Consulting Engineers
299 Atlantic Avenue
Boston 10, Mass.

Avion Division
ACF Industries, Inc.
800 No. Pitt Street
Alexandria, Virginia
Attn: Library

Battelle Memorial Institute
505 King Avenue
Attn: Wayne E. Rife, Project Leader
Electrical Engineering Division
Columbus 1, Ohio

Bell Aircraft Corporation
Post Office Box One
Buffalo 5, New York
Attn: Eunice P. Hazelton, Librarian

Bell Telephone Laboratories, Inc.
Whippany Laboratory
Whippany, New Jersey
Attn: Technical Information Library

Pacific Division
Bendix Aviation Corporation
11600 Sherman Way
North Hollywood, California
Engineering Library
Attn: Peggie Robinson, Librarian

Bendix Radio Division
Bendix Aviation Corp.
E. Joppa Road
Towson 4, Maryland
Attn: Dr. D. M. Allison, Jr.
      Director Engineering and Research

Boeing Airplane Company
Pilotless Aircraft Division
P.O. Box 3707
Seattle 24, Washington
Attn: R.R. Barber, Library Supervisor

Boeing Airplane Company
Wichita Division Engineering Library
Wichita 1, Kansas
Attn: Kenneth C. Knight, Librarian

Boeing Airplane Company
Seattle Division
Seattle 14, Washington
Attn: E.T. Allen, Library Supervisor

Bjorksten Research Labs, Inc.
P. O. Box 265
Madison, Wisconsin
Attn: Mrs. Fern B. Korsgard

Convair, A Division of General Dynamics
      Corp.
Fort Worth, Texas
Attn: K.G. Brown, Division Research
                  Librarian

Convair, A Division of General Dynamics
      Corp.
San Diego 12, California
Attn: Mrs. Dora B. Burke,
      Engineering Librarian

Cornell Aeronautical Laboratory, Inc.
4455 Genesee Street
Buffalo 21, New York
Attn: Librarian

Dalmo Victor Company
A Division of Textron, Inc.
1515 Industrial Way
Belmont, California
Attn: Mary Ellen Addems,
      Technical Librarian

Dorne and Margolin, Inc.
29 New York Avenue
Westbury, Long Island, N. Y.

Douglas Aircraft Company, Inc.
P.O. Box 200
Long Beach 1, California
Attn: Engineering Library (C-250)

Douglas Aircraft Co., Inc.
827 Lapham Street
El Segundo, California
Attn: Engineering Library

Douglas Aircraft Company, Inc.
3000 Ocean Park Boulevard
Santa Monica, California
Attn: P.T. Cline
      Eq. Sec. Reference Files,
      Eq. Eng. A250

Douglas Aircraft Company, Inc.
2000 North Memorial Drive
Tulsa, Oklahoma
Attn: Engineering Library, D-250

Electronics Communication, Inc.
1830 York Road
Timonium, Maryland

Emerson and Cuming, Inc.
869 Washington Street
Canton, Mass.
Attn: Mr. W. Cuming

Emerson Electric Mfg. Co.
8100 West Florissant Avenue
St. Louis 21, Missouri
Attn: Mr. E.R. Breslin, Librarian

Sylvania Elec. Prod. Inc.
Electronic Defense Laboratory
P.O. Box 205 - (Uncl)
Mountain View, California
Attn: Library

Fairchild Aircraft Division
Fairchild Eng. and Airplane Corp.
Hagerstown, Maryland
Attn: Library

Farnsworth Electronics Company
3700 East Pontiac Street
Fort Wayne 1, Indiana
Attn: Technical Library

Federal Telecommunication Labs.
500 Washington Avenue
Nutley 10, New Jersey
Attn: Technical Library

The Gabriel Electronics
Division of the Gabriel Company
135 Crescent Road
Needham Heights 94, Mass.
Attn: Mr. Steven Galagan

General Electric Advanced Electronics Center
Cornell University
Ithaca, New York
Attn: J. B. Travis

General Electric Company
Electronics Park
Syracuse, New York
Attn: Documents Library, B. Fletcher
                        Building 3-143A

General Precision Laboratory, Inc.
63 Bedford Road
Pleasantville, New York
Attn: Mrs. Mary G. Herbst, Librarian

Goodyear Aircraft Corp.
1210 Massillon Road
Akron 15, Ohio
Attn: Library D/120 Plant A

Granger Associates
Electronic Systems
966 Commercial Street
Palo Alto, California
Attn: John V. N. Granger, President

Grumman Aircraft Engineering Corporation
Bethpage, Long Island, N. Y.
Attn: Mrs. A. M. Grey, Librarian
      Engineering Library, Plant No. 5

The Hallicrafters Company
4401 West 5th Avenue
Chicago 24, Illinois
Attn: LaVerne LaGioia, Librarian

Hoffman Laboratories, Inc.
3761 South Hill Street
Los Angeles 7, California
Attn: Engineering Library

Hughes Aircraft Company
Antenna Department
Microwave Laboratory
Building 12, Room 2617
Culver City, California
Attn: M. D. Adcock

Hughes Aircraft Company
Florence and Teale Streets
Culver City, California
Attn: Dr. L.C. Van Atta, Associate Director
                        Research Labs.

Hycon Eastern, Inc.
75 Cambridge Parkway
Cambridge, Mass.
Attn: Mrs. Lois Seulowitz
      Technical Librarian

International Business Machines Corp.
Military Products Division
590 Madison Avenue
New York 33, New York
Attn: Mr. C.F. McElwain, General Manager

International Business Machines Corp.
Military Products Division
Owego, New York
Attn: Mr. D. I. Marr, Librarian
      Department 459

International Resistance Company
401 N. Broad Street
Philadelphia 8, Pa.
Attn: Research Library

Jansky and Bailey, Inc.
1339 Wisconsin Avenue, N. W.
Washington 7, D. C.
Attn: Mr. Delmer C. Ports

Dr. Henry Jasik, Consulting Engineer
298 Shames Drive
Brush Hollow Industrial Park
Westbury, New York

Electromagnetic Research Corporation
711 14th Street, N. W.
Washington 5, D. C.

Lockheed Aircraft Corporation
2555 N. Hollywood Way
California Division Engineering Library
Department 72-75, Plant A-1, Bldg. 63-1
Burbank, California
Attn: N. C. Harnois

The Martin Company
P. O. Box 179
Denver 1, Colorado
Attn: Mr. Jack McCormick

The Glenn L. Martin Company
Baltimore 3, Maryland
Attn: Engineering Library
Antenna Design Group

Maryland Electronic Manufacturing Corp.
5009 Celvert Road
College Park, Maryland
Attn: Mr. H. Warren Cooper

Mathematical Reviews
190 Hope Street
Providence 6, Rhode Island

The W. L. Maxson Corporation
460 West 34th Street
New York, N. Y.
Attn: Miss Dorothy Clark

McDonnell Aircraft Corporation
Lambert Saint-Louis Municipal Airport
Box 516, St. Louis 3, Missouri
Attn: R. D. Detrich, Engineering Library

McMillan Laboratory, Inc.
Brownville Avenue
Ipswich, Massachusetts
Attn: Security Officer, Document Room

Melpar, Inc.   (2)
3000 Arlington Boulevard
Falls Church, Virginia
Attn: Engineering Technical Library

Microwave Development Laboratory
90 Broad Street
Babson Park 57, Massachusetts
Attn: N. Tucker, General Manager

Microwave Radiation Company Inc.
19223 South Hamilton Street
Gardena, California
Attn: Mr. Morris J. Ehrlich, President

Chance Vought Aircraft, Ino.
9314 West Jefferson Street
Dallas, Texas
Attn: Mr. H. S. White, Librarian

Northrop Aircraft, Inc.
Hawthorne, California
Attn: Mr. E. A. Freitas, Library Dept.3145
       1001 E. Broadway

Remington Rand Univ. - Division of Sperry
                   Rand Corporation
1900 West Allegheny Avenue
Philadelphia 29, Pennsylvania
Attn: Mr. John F. McCarthy
       R and D Sales and Contracts

North American Aviation, Inc.
12214 Lakewood Boulevard
Downey, California
Attn: Engineering Library 495-115

North American Aviation, Inc.
Los Angeles International Airport
Los Angeles 45, California
Attn: Engineering Technical File

Page Communications Engineers, Inc.
710 Fourteenth Street, Northwest
Washington 5, D. C.
Attn: Librarian

Philco Corporation Research Division
Branch Library
4700 Wissachickon Avenue
Philadelphia 44, Pa.
Attn: Mrs. Dorothy S. Collins

Pickard and Burne, Inc.
240 Highland Avenue
Needham 94, Mass.
Attn: Dr. J. T. DeBettencourt

Polytechnic Research and Development
Company, Inc.
202 Tillary Street
Brooklyn 1, New York
Attn: Technical Library

Radiation Engineering Laboratory
Main Street
Maynard, Mass.
Attn: Dr. John Ruze

Radiation, Inc.
P. O. Drawer 37
Melbourne, Florida
Attn: Technical Library, Mr. M.L. Cox

Radio Corp. of America
RCA Laboratories
Rocky Point, New York
Attn: P. S. Carter, Lab. Library

RCA Laboratories
David Sarnoff Research Center
Princeton, New Jersey
Attn: Miss Fern Cloak, Librarian
       Research Library

Radio Corporation of America
Defense Electronic Products
Building 10, Floor 7
Camden 2, New Jersey
Attn: Mr. Harold J. Schrader
       Staff Engineer, Organization
       of Chief Technical
       Administrator

The Ramo-Wooldridge Corporation
P.O. Box 45453 Airport Station
Los Angeles 45, California
Attn: Margaret C. Whitnah,
       Chief Librarian

Roover Microwave Co.
9592 Baltimore Avenue
College Park, Maryland

Director, USAF Project RAND
Via: Air Force Liaison Office
The Rand Corporation
1700 Main Street
Santa Monica, California

Rantec Corporation
Calabasas, California
Attn: Grace Keener, Office Manager

Raytheon Manufacturing Company
Missile Systems Division
Bedford, Mass.
Attn: Mr. Irving Goldstein

Raytheon Manufacturing Company
Wayland Laboratory, State Road
Wayland, Mass.
Attn: Mr. Robert Borts

Raytheon Manufacturing Company
Wayland Laboratory
Wayland, Mass.
Attn: Miss Alice G. Anderson,
       Librarian

Republic Aviation Corporation
Farmingdale, Long Island, N. Y.
Attn: Engineering Library

Thru: Air Force Plant Representative
       Republic Aviation Corp.
       Farmingdale, Long Island, N.Y.

Rheem Manufacturing Company
9236 East Hall Road
Downey, California
Attn: J. C. Joerger

Trans-Tech, Inc.
P. O. Box 346
Frederick, Maryland

Ryan Aeronautical Company
Lindbergh Field
San Diego 12, California
Attn: Library - unclassified

Sage Laboratories
159 Linden Street
Wallealey 81, Mass.

Sanders Associates
95 Canal Street
Nashua, New Hampshire
Attn: N. R. Wild, Library

Sandia Corporation, Sandia Base
P.O. Box 5800, Albuquerque, New Mexico
Attn: Classified Document Division

Sperry Gyroscope Company
Great Neck, Long Island, New York
Attn: Florence W. Turnbull, Engr. Librarian

Stanford Research Institute
Menlo Park, California
Attn: Library, Engineering Division

Sylvania Electric Products, Inc.
100 First Avenue
Waltham 54, Mass.
Attn: Charles A. Thornhill, Report Librarian
       Waltham Laboratories Library

Systems Laboratories Corporation
14852 Ventura Boulevard
Sherman Oaks, California
Attn: Donald L. Margerum

TRG, Inc.
17 Union Square West
New York 3, N. Y.
Attn: M. L. Henderson, Librarian

A. S. Thomas, Inc.
161 Devonshire Street
Boston 10, Mass.
Attn: A. S. Thomas, President

Bell Telephone Laboratories
Murray Hill
New Jersey

Chu Associates
P. O. Box 387
Whitcomb Avenue
Littleton, Mass.

Microwave Associates, Inc.
Burlington, Mass.

Raytheon Manufacturing Company
Missile Division
Hartwell Road
Bedford, Mass.

Radio Corporation of America
Aviation Systems Laboratory
225 Crescent Street
Waltham, Mass.

Lockheed Aircraft Corporation
Missile Systems Division Research Library
Box 504, Sunnyvale, California
Attn: Miss Eva Lou Robertson,
       Chief Librarian

The Rand Corporation
1700 Main Street
Santa Monica, California
Attn: Dr. W. C. Hoffman

Commander
AF Office of Scientific Research
Air Research and Development Command
14th Street and Constitution Avenue
Washington, D. C.
Attn: Mr. Otting, SRY

Westinghouse Electric Corp.
Electronics Division
Friendship Int'l Airport Box 746
Baltimore 3, Maryland
Attn: Engineering Library

Wheeler Laboratories, Inc.
122 Cutter Mill Road
Great Neck, New York
Attn: Mr. Harold A. Wheeler

Zenith Plastics Co.
Box 91
Gardena, California
Attn: Mr. S. S. Oleesky

Library Geophysical Institute
of the University of Alaska
College
Alaska

University of California
Berkeley 4, California
Attn: Dr. Samuel Silver,
    Prof. Engineering Science
    Division of Elec. Eng. Electronics
    Research Lab.

University of California
Electronics Research Lab.
332 Cory Hall
Berkeley 4, California
Attn: J. R. Whinnery

California Institute of Technology
Jet Propulsion Laboratory
4800 Oak Grove Drive
Pasadena, California
Attn: Mr. I. E. Newlan

California Institute of Technology
1201 E. California Street
Pasadena, California
Attn: Dr. C. Papas

Carnegie Institute of Technology,
Schenley Park
Pittsburgh 13, Pennsylvania
Attn: Prof. A. E. Heins

Cornell University
School of Electrical Engineering
Ithaca, New York
Attn: Prof. G. C. Dalman

University of Florida
Department of Electrical Engineering
Gainesville, Florida
Attn: Prof. M. H. Latour, Library

Library
Georgia Institute of Technology
Engineering Experiment Station
Atlanta, Georgia
Attn: Mrs. J.H. Crosland, Librarian

Harvard University
Technical Reports Collection
Gordon McKay Library, 303A Pierce Hall
Oxford Street, Cambridge 38, Mass.
Attn: Mrs. E.L. Hufschmidt, Librarian

Harvard College Observatory
60 Garden Street
Cambridge 39, Mass.
 Attn: Dr. Fred L. Whipple

University of Illinois
Documents Division Library
Urbana, Illinois

University of Illinois
College of Engineering
Urbana, Illinois
Attn: Dr. P. E. Moyes, Department of
    Electrical Engineering

The Johns Hopkins University
Homewood Campus
Department of Physics
Baltimore 18, Maryland
Attn: Dr. Donald E. Kerr

Sandia Corporation
Attn: Organization 1423
Sandia Base
Albuquerque, New Mexico

Applied Physics Laboratory
The Johns Hopkins University
8621 Georgia Avenue
Silver Spring, Maryland
Attn: Mr. George L. Seielstad

Massachusetts Institute of Technology
Research Laboratory of Electronics
Room 20B-221
Cambridge 39, Massachusetts
Attn: John H. Hewitt

Massachusetts Institute of Technology
Lincoln Laboratory
P. O. Box 73
Lexington 73, Mass.
Attn: Document Room A-229

University of Michigan
Electronic Defense Group
Engineering Research Institute
Ann Arbor, Michigan
Attn: J. A. Boyd, Supervisor

University of Michigan
Engineering Research Institute
Radiation Laboratory
Attn: Prof. K. M. Siegel
912 N. Main St.,
Ann Arbor, Michigan

University of Michigan
Engineering Research Institute
Willow Run Laboratories
Willow Run Airport
Ypsilanti, Michigan
Attn: Librarian

University of Minnesota
Minneapolis 14, Minnesota
Attn: Mr. Robert H. Stumm, Library

Northwestern University
Microwave Laboratories
Evanston, Illinois
Attn: R. E. Beam

Ohio State University Research Found.
Ohio State University
Columbus 10, Ohio
Attn: Dr. T.E. Tice
    Dept. of Elec. Engineering

The University of Oklahoma
Research Institute
Norman, Oklahoma
Attn: Prof. C. L. Farrar, Chairman
    Electrical Engineering

Polytechnic Institute of Brooklyn
Microwave Research Institute
55 Johnson Street
Brooklyn, New York
Attn: Dr. Arthur A. Oliner

Polytechnic Institute of Brooklyn
Microwave Research Institute
55 Johnson Street
Brooklyn, New York
Attn: Mr. A. E. Laemmel

Syracuse University Research Institute
Collendale Campus
Syracuse 10, New York
Attn: Dr. C. S. Grove, Jr.
    Director of Engineering Research

The University of Texas
Elec. Engineering Research Laboratory
P. O. Box 8026, University Station
Austin 12, Texas
Attn: Mr. John R. Gerhardt
    Assistant Director

The University of Texas
Defense Research Laboratory
Austin, Texas
Attn: Claude W. Horton, Physics Library

University of Toronto
Department of Electrical Engineering
Toronto, Canada
Attn: Prof. G. Sinclair

Lowell Technological Institute
Research Foundation
P. O. Box 709, Lowell, Mass.
Attn: Dr. Charles R. Mingins

University of Washington
Department of Electrical Engineering
Seattle 5, Washington
Attn: G. Held, Associate Professor

Stanford University
Stanford, California
Attn: Dr. Chodorow
    Microwave Laboratory

Physical Science Laboratory
New Mexico College of Agriculture
and Mechanic Arts
State College, New Mexico
Attn: Mr. H. W. Haas

 Brown University
Department of Electrical Engineering
Providence, Rhode Island
Attn: Dr. C. M. Angulo

Case Institute of Technology
Cleveland, Ohio
Attn: Prof. S. Seeley

Columbia University
Department of Electrical Engineering
Morningside Heights
New York, N. Y.
Attn: Dr. Schlesinger

McGill University
Montreal, Canada
Attn: Prof. G. A. Woonton
    Director, The Eaton Electronics
    Research Lab.

Purdue University
Department of Electrical Engineering
Lafayette, Indiana
Attn: Dr. Schultz

The Pennsylvania State University
Department of Electrical Engineering
University Park, Pennsylvania

University of Pennsylvania
Institute of Cooperative Research
3400 Walnut Street
Philadelphia, Pennsylvania
Attn: Dept. of Electrical Engineering

University of Tennessee
Ferris Hall
W. Cumberland Avenue
Knoxville 16, Tennessee

University of Wisconsin
Department of Electrical Engineering
Madison, Wisconsin
Attn: Dr. Scheibe

University of Seattle
Department of Electrical Engineering
Seattle, Washington
Attn: Dr. D. K. Reynolds

Wayne University
Detroit, Michigan
Attn: Prof. A. F. Stevenson

Electronics Research Laboratory
Illinois Institute of Technology
3300 So. Federal Street
Chicago 16, Illinois
Attn: Dr. Lester C. Peach
    Research Engineer

Advisory Group on Electronic Parts
Room 103
Moore School Building
200 South 33rd Street
Philadelphia 4, Pennsylvania

Ionosphere Research Laboratory
Pennsylvania State College
State College, Pennsylvania
ATTN: Professor A. H. Waynick, Director

Institute of Mathematical Sciences
25 Waverly Place
New York 3, New York
ATTN: Librarian

Electronics Division
Rand Corporation
1700 Main Street
Santa Monica, California
ATTN: Dr. Robert Kalaba

National Bureau of Standards
Washington, D. C.
ATTN: Dr. W. K. Saunders

Applied Mathematics and Statistics Lab.
Stanford University
Stanford, California
ATTN: Dr. Albert H. Bowker

Department of Physics and Astronomy
Michigan State College
East Lansing, Michigan
ATTN: Dr. A. Leitner

University of Tennessee
Knoxville, Tennessee
ATTN: Dr. Fred A. Ficken

Lebanon Valley College
Annville, Pennsylvania
ATTN: Professor B.H. Bissinger

General Atomic
P. O. Box 608
San Diego 12, California
Attn: Dr. Edward Gerjuoy

Department of Physics
Amherst College
Amherst, Mass.
ATTN: Dr. Arnold Arons

California Institute of Technology
1201 E. California Street
Pasadena, California
ATTN: Dr. A. Erdelyi

Mathematics Department
Stanford University
Stanford, California
ATTN: Dr. Harold Levine

University of Minnesota
Minneapolis 14, Minnesota
ATTN: Professor Paul C. Rosenbloom

Department of Mathematics
Stanford University
Stanford, California
ATTN: Professor Bernard Epstein

Applied Physics Laboratory
The John Hopkins University
8621 Georgia Avenue
Silver Spring, Maryland
ATTN: Dr. B. S. Gourary

(2) Exchange and Gift Division
The Library of Congress
Washington 25, D. C.

Electrical Engineering Department
Massachusetts Institute of Technology
Cambridge 39, Mass.
ATTN: Dr. L. J. Chu

Nuclear Development Associates, Inc.
5 New Street
White Plains, New York
ATTN: Library

California Institute of Technology
Electrical Engineering
Pasadena, California
ATTN: Dr. Zohrab A. Kaprielian

Dr. Rodman Doll
311 W. Cross Street
Ypsilanti, Michigan

California Inst. of Technology
Pasadena, California
ATTN: Mr. Calvin Wilcox

(3) Mr. Robert Brockhurst
Woods Hole Oceanographic Institute
Woods Hole, Mass.

National Bureau of Standards
Boulder, Colorado
ATTN: Dr. R. Gallet

Dr. Solomon L. Schwebel
3689 Louis Road
Palo Alto, California

University of Minnesota
The University of Library
Minneapolis 14, Minnesota
ATTN: Exchange Division

Department of Mathematics
University of California
Berkeley, California
ATTN: Professor Bernard Friedman

Lincoln Laboratory
Massachusetts Institute of Technology
P. O. Box 73
Lexington 73, Massachusetts
ATTN: Dr. Shou Chin Wang, Room C-351

Melpar, Inc.,
3000 Arlington Boulevard
Falls Church, Virginia
ATTN: Mr. K. S. Kelleher, Section Head

Hq. Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Mass.
ATTN: Mr. Francis J. Zucker, CRRD

Hq. Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Mass.
ATTN: Dr. Philip Newman, CRRK

Mr. N. C. Gerson
Trapelo Road
South Lincoln, Mass.

Dr. Richard B. Barrer
Systems Development Corp.
2400 Colorado Avenue
Santa Monica, California

Columbia University Hudson Laboratories
P.O. Box 239
145 Palisade Street, Dobbs Ferry, N. Y.
ATTN: Dr. N. W. Johnson

Institute of Fluid Dynamics
and Applied Mathematics
University of Maryland
College Park, Maryland
ATTN: Dr. Elliott Montroll

Department of Electrical Engineering
Washington University
Saint Louis 5, Mo.
ATTN: Professor J. Van Bladel

Department of the Navy
Office of Naval Research Branch Office
1030 E. Green Street
Pasadena 1, California

Brandeis University
Waltham, Mass.
ATTN: Library

General Electric Company
Microwave Laboratory
Electronics Division
Stanford Industrial Park
Palo Alto, California
ATTN: Library

Smyth Research Associates
3555 Aero Court
San Diego 3, California
ATTN: Dr. John B. Smyth

Electrical Engineering
California Institute of Technology
Pasadena, California
ATTN: Dr. Georges G. Weill

Naval Research Laboratory
Washington 25, D. C.
ATTN: Henry J. Passerini, Code 5278A

Dr. George Kear
5 Culver Court
Orinda, California

Brooklyn Polytechnic
85 Livingston Street
Brooklyn, New York
ATTN: Dr. Nathan Marcuvitz

Department of Electrical Engineering
Brooklyn Polytechnic
85 Livingston Street
Brooklyn, New York
ATTN: Dr. Jerry Shmoys

Department of Mathematics
University of New Mexico
Albuquerque, New Mexico
ATTN: Dr. I. Kolodner

Mathematics Department
Polytechnic Institute of Brooklyn
Johnson and Jay Street
Brooklyn, New York
ATTN: Dr. Harry Hochstadt

Ballistics Research Laboratory
Aberdeen Proving Grounds
Aberdeen, Maryland
ATTN: Dr. Pullen Keats

Dr. Lester Kraus
4935 Whitehaven Way
San Diego, California

University of Minnesota
Institute of Technology
Minneapolis, Minnesota
Attn: Dean Athelston Spilhaus

Ohio State University
Columbus, Ohio
Attn: Prof. C. T. Tai
Department of Electrical Eng.

Naval Research Laboratories
Washington 25, D. C.
Attn: W. S. Ament, Code 5271

Naval Research Laboratory
Washington 25, D. C.
Attn: Dr. Leslie G. McCracken, Jr.
              Code 3933A

Office of Naval Research
Department of the Navy
Attn: Geophysics Branch, Code 416
Washington 25, D. C.

Office of Chief Signal Officer
Signal Plans and Operations Division
Attn: SIGOL-2, Room 20
Com. Liaison Br., Radio Prop. Sect.
The Pentagon, Washington 25, D. C.

Defence Research Member
Canadian Joint Staff
2001 Connecticut Street
Washington, D. C.

Central Radio Prop. Lab.
National Bureau of Standards
Attn: Technical Reports Library
Boulder, Colorado

U. S. Weather Bureau
U. S. Department of Commerce
Washington 25, D. C.
Attn: Dr. Harry Wexler

Federal Communications Commission
Washington 25, D. C.
Attn: Mrs. Barbara C. Grimes, Librarian

Upper Atmosphere Research Section
Central Radio Propagation Laboratory
National Bureau of Standards
Boulder, Colorado

Argonne National Laboratory
P.O. Box 299
Lemont, Illinois
Attn: Dr. Hoylande D. Young

Bell Telephone Labs.
Murray Hill, New Jersey
Attn: Dr. S. O. Rice, 3B - 203

Carnegie Institute of Washington
Dept. of Terrestrial Magnetism
5241 Broad Branch Road, N. W.
Washington 15, D. C.
Attn: Library

Georgia Tech Research Institute
225 N. Avenue, N. W.
Attn: Dr. James E. Boyd
Atlanta, Georgia

University of Maryland
College Park, Maryland
Attn: Dr. A. Weinstein
Institute of Fluid Dynamics

Massachusetts Institute of Technology
Lincoln Laboratory
P. O. Box 73
Lexington 73, Massachusetts
Attn: Prof. Radford, Division 3 Head

Willow Run Research Center
University of Michigan
Willow Run Airport
Ypsilanti, Michigan
Attn: Dr. C. L. Dolph

School of Engineering
New York University
University Heights
New York, New York

Shell Fellowship Committee of the
Shell Companies Foundation, Inc.
50 West 50th Street
New York 20, N. Y.
Attn: Mr. J. R. Janssen

Esso Research and Engineering Co.
P. O. Box 51
Linden, New Jersey
Attn: Mr. C. L. Brown, Manager

Union Carbide and Carbon Corp.
30 E. 42nd Street
New York 17, New York
Attn: Mr. L. E. Erlandson

Convair
San Diego 12, California
Attn: Mr. Marvin Stern

Bell Telephone Labs., Inc.
463 West Street
New York 13, N. Y.
Attn: Dr. Mervin J. Kelly

Engineering Library
University of California
405 Hilgard Avenue
Los Angeles 24, California

Convair, A Division of General Dynamics Corp.
Daingerfield, Texas
Attn: J. E. Arnold, Division Manager

Convair, A Division of General Dynamics Corp.
San Diego 12, California
Attn: R. L. Bayless, Chief Engineer

Convair, a Division of General Dynamics Corp.
San Diego 12, California
Attn: K. J. Bossart, Chief Engineer-WS107A

Convair, A Div. of General Dynamics
Corp.
Fort Worth 1, Texas
Attn: F. W. Davis, Chief Engineer

Convair, A Div. of General Dynamics
Corp.
Pomona, California
Attn: C. D. Perrine
        Ass't Div. Manager, Engin.

Shell Development Company
Exploration and Production Res. Div.
3737 Bellaire Boulevard
Houston 25, Texas
Attn: Miss Aphrodite Mamoulides

RCA Laboratories
Princeton, New Jersey
Attn: Dr. Charles Polk

Stanford Research Institute
S. Pasadena, California
Attn: Dr. J. Brandstatten

Wayne State University
Kresge-Hooker Science Library
5250 Second Boulevard
Detroit 2, Michigan

ARRA
1 Bond Street
Westbury, L. I., New York
Attn: Dr. Norman Spector

Varian Associates
611 Hansen Way
Palo Alto, California
Attn: Mrs. Perry Conway
        Technical Librarian

Case Institute of Technology
Department of Electrical Engin.
University Circle
Cleveland 6, Ohio
Attn: Prof. Robert Plonsey

Dr. Ming S. Wong, CRRKP
Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Massachusetts

Physics Section
AVCO-RAD Division
20 South Union Street
Lawrence, Mass.
Attn: Dr. Ernest Bauer

Advanced Development Section
Western Development Labs.
Philco Corp.
3875 Fabian Way
Palo Alto, California
Attn: Dr. Albert R. Giddis

Department of Aeronautical Engineering
University of Michigan
Ann Arbor, Michigan
Attn: Prof. Mahinder Uberoi

Gordon McKay Laboratory
Harvard University
Cambridge 39, Mass.
Attn: Dr. S. R. Seshadri

Commander
Air Research and Development Command
Attn: RDTR
Andrews Air Force Base
Washington 25, D. C.

College of Engineering
Dept. of Electrical Engineering
University of Florida
Gainesville, Florida
Attn: Dr. Sullivan

Dr. V. M. Papadopoulos
Dept. of Engineering
Brown University
Providence, R. I.

Major Vernon Lee Dawson
RSDD-OML(MO)
Redstone Arsenal
Huntsville, Alabama

Grumman Aircarft Engineering Corp.
South Oyster Bay Road
Bethpage, Long Island, N. Y.
Attn: Dr. Charles Mack

AF Office of Scientific Research
Washington 25, D. C.
Attn: Dr. Karl Kaplan

University of California
Radiation Laboratory
P. O. Box 808
Livermore, California
Attn: Dr. Bernard A. Lippmann

Department of Electrical Engineering
Case Institute of Technology
University Circle
Cleveland 6, Ohio
Attn: Professor Albert E. Collin

Antenna Laboratory
Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Massachusetts
Attn: Mr. Philip Blackstone

Lt. Mark J. Beran, CRRD
Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Massachusetts

Mr. Richard Mack, CRRD
Air Force Cambridge Research Center
Laurence G. Hanscom Field
Bedford, Massachusetts

System Development Corporation
2500 Colorado Avenue
Santa Monica, California
Attn: Library

N. Y. U. Institute of
Mathematical Sciences
25 Waverly Place
New York 3, N. Y.